




**NTN 6815LLU deep groove ball bearings**

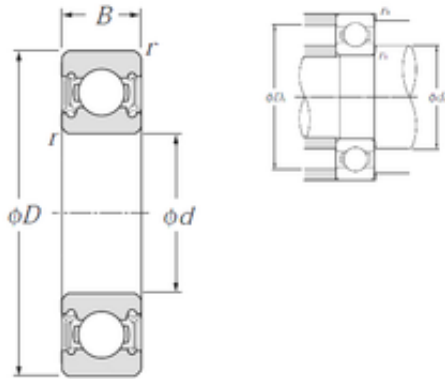

Bearing No. 6815LLU

6815LLU Bearing 2D drawings and 3D CAD models

Size	75x95x10 mm
Bore Diameter	75 mm
Outer Diameter	95 mm
Width	10 mm
d	75 mm
D	95 mm
B	10 mm
C	10 mm
r min.	0,6 mm
da min.	79 mm
da max	80 mm
Da max.	91 mm
ra max.	0,6 mm
Weight	0,145 Kg
Basic dynamic load rating (C)	12,5 kN
Basic static load rating (C0)	12,9 kN
Reference speed	3 600 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.142
EAN	4547359586091
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0



## EAO Bearing Machine Development Co., Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	75MM Bore; 95MM Outside Diameter; 10MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6815LLU/2AS
Weight / LBS	0.314
Outer Race Width	0.394 Inch   10 Millimeter
Bore	2.953 Inch   75 Millimeter
Outside Diameter	3.74 Inch   95 Millimeter
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	75 mm
static load capacity:	12900 N



## EAO Bearing Machine Development Co., Ltd

outside diameter:	95 mm
precision rating:	ISO Class 0
overall width:	10 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	10 mm
snap ring included:	Without Snap Ring
outer ring width:	10 mm
internal clearance:	CN
maximum rpm (grease):	3600 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	0.6 mm
dynamic load capacity:	12500 N
manufacturer product page:	<a href="#">Click here</a>